




Visual Technology Solutions

INTERACTIVE FLAT PANEL

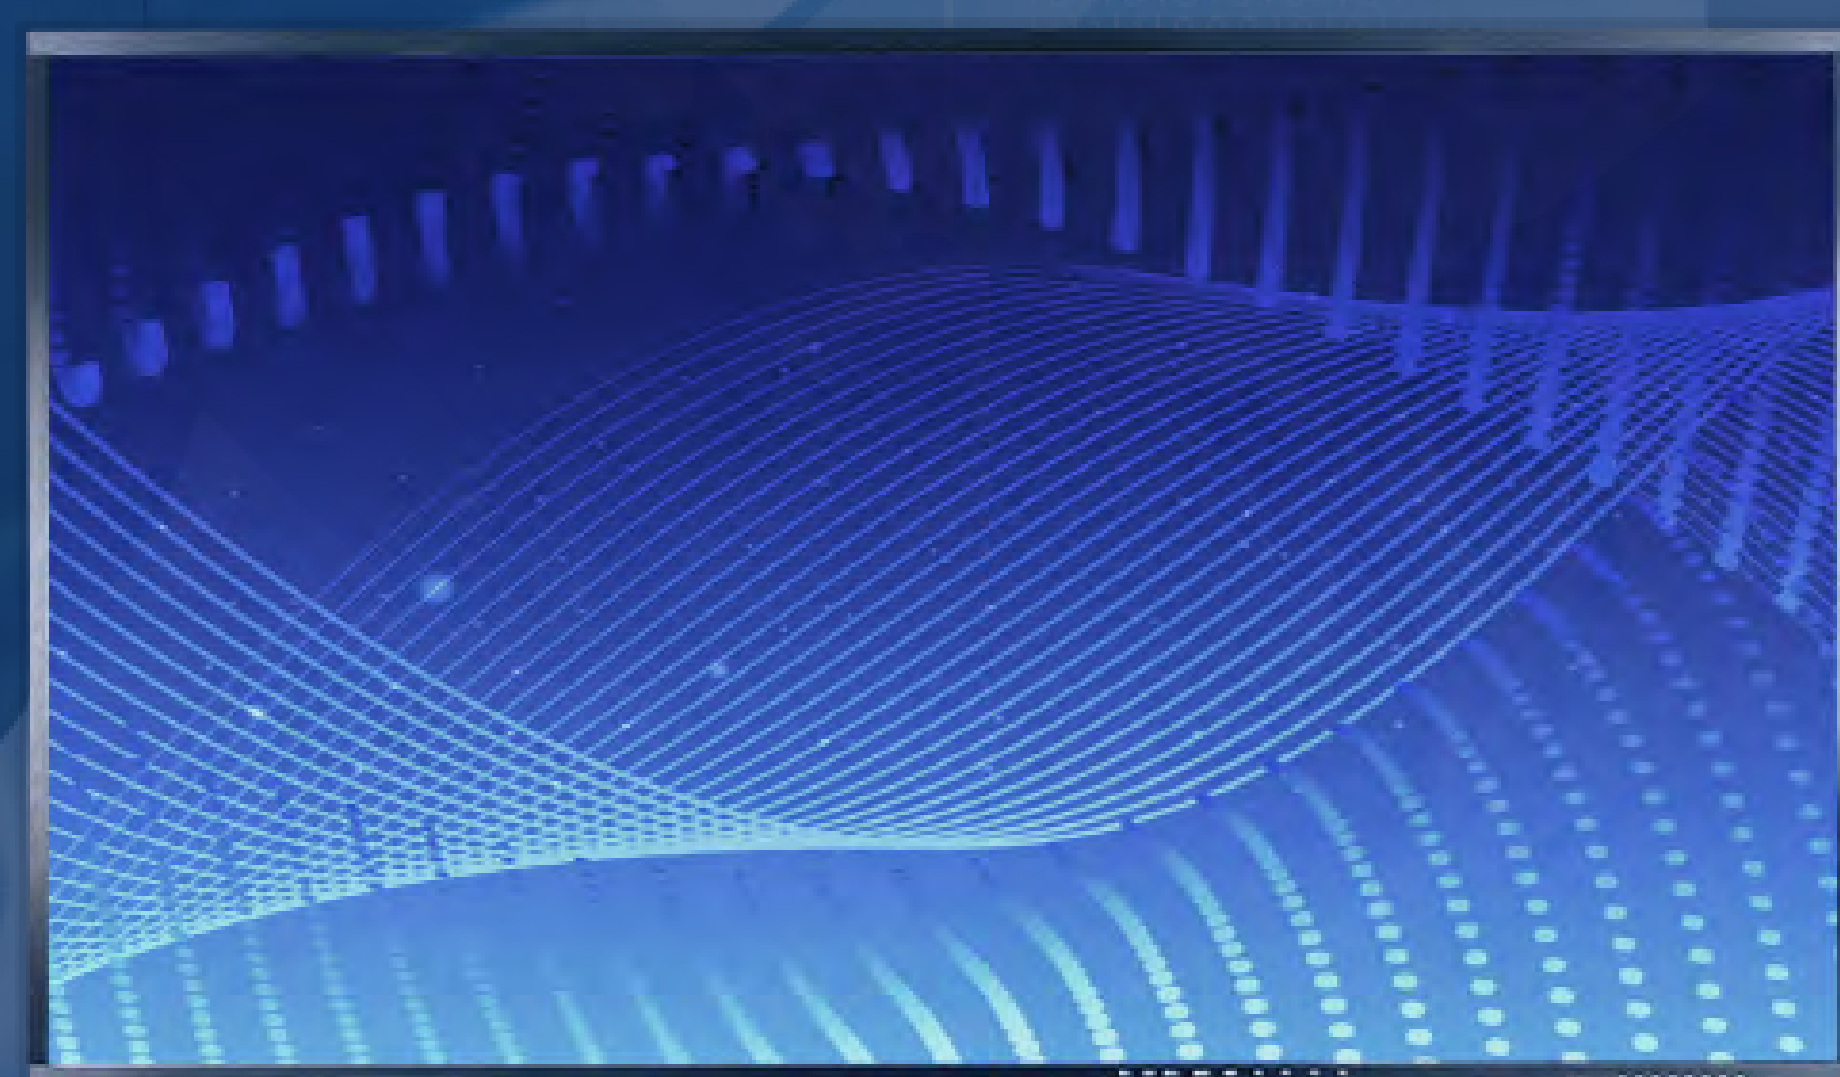

C A T A L O G

Interactive Flat Panel



Model		55"	65"	75"	86"
Display parameters	Active display area(mm)	1209.6(H)× 680.4(V)	1428.48(H)×803.52(V)	1650.24(H)×928.26(V)	1895.04(H)×1065.96(V)
	Display scale	16:9			
	Brightness	350cd/m ²			
	Contrast	1200:1			
	Colours	16.7M 8bit True color	16.7 10bit True color		
	Blacklight type	DLED			
	Viewing angle (H / V)	178°/178°			
	Resolution	1920 * 1080	3840 * 2160		
Panel parameters	Video format	PAL/NTSC/SECAM			
	Sound system	DK/BG/I			
	Sound output power	2X10W	≤250W	≤350W	≤500W
	Power consumption	≤200W			
	Standby power consumption	≤0.5W			
	Lifetime	30000h			
	Input power	100-240V, 50/60Hz			
	Overall size LxHxW (mm)	1257.6x 743.6x 84	1485x 887.58x 92	1707.16x 1012.72x 92	1953.3x 1151.42x 93
		1257.6x 743.6x 115	1485x 887.58x 126.6 (Including rack)	1707.16x 1012.72x126.6 (Including rack)	1953.3x 1151.42x 126.6 (Including rack)
	Package size LxHxW (mm)	1350x870x190	1626x1060x200	1847x1185x205	2101x 1338x220
	Net weight	38KG	38KG	52KG	67KG
	Gross weight	48KG	48KG	66KG	82KG
	Working environment	Working temperature: 0 ~ 50 ; Operating humidity: 10% RH ~ 80% RH;			
	Storage environment	Storage temperature: -20 ° C to 60 ° C; Storage humidity: 10% RH to 90% RH;			

*Attention! This information is provided for reference. Arkadiko Technology can manufacture Interactive panel for any request of the Customer. Please contact and check with our sales manager before purchase.

Panel parameters	Input port	Front ports: USB2.0*1, USB3.0*1	
		Rear ports: TouchUSB*1, RJ45*1, AV IN *1, YPBPR*1, VGA IN*1, VGA AUDIO IN*1,RS232 UART*1,HDMI IN*2, Sdcard*1, USB3.0*2,	
	Output port	EARPHONE*1, HDMI OUT*1, AV OUT*1, SPDIF OUT*1,	
	WIFI	2.4+5G,	
	Bluetooth	None	
Android system parameters	CPU	Hi3751ARBCV811 (CPU Dual-core A73 and dual-core A53 /1.5G)	
	GPU	Quad-core MaliG51	
	ROM	4G	
	FLASH	32G	
	Android version	Andriod8.0	
	OSD language	Chinese, English, Russian	
OPS	Parameters	Optional	
Touch parameters	Touch type	Infrared touch	
	Installation method	Built-in front disassembly	
	Touch screen sensing method	~ 3.Finger, writing pen, or other non-transparent objects Ø6mm	Finger, writing pen, or other non-transparent objects Ø1mm
	Resolution	32767*32767	
	Touch system communication port	USB 2.0	
	Responding speed	≤8 ms	
	Positioning accuracy	≤±2mm	
	Light resistance	88K LUX	
	Multi-touch	10 point touch	20 point touch
	Touch Times	60 million times in the same location	
	Supported Operating System	WIN7,WIN8,WIN10,LINUX,Android,MAC	
Accessories	Remote	1 pcs	
	AAA battery	1 set	
	Manual	1 pcs	
	GB three plug power cord	Standart 2m 1 pcs	
	Stylus	1 pcs	
	Warranty Card	1 pcs	
	Certificate of conformity	1 pcs	
	Wall mount	1 set	

*Attention! This information is provided for reference. Arkadiko Technology can manufacture Interactive panel for any request of the Customer. Please contact and check with our sales manager before purchase.